

Barkmate Deluxe Spray Bark Control Collar Owner's Manual

How the Barkmate Deluxe Spray Bark Control Collar Works

The Barkmate Deluxe Bark Control Collar is an effective bark deterrent. This Bark Control Collar has a "Smart" microphone sensor that provides reliable bark detection.

The micro computer chip in the collar can help discriminate barking from other external noises. The collar emits a burst of spray to distract the dog with the smell of the spray to deter barking.

Features:

- Suitable for sensitive dogs from 5kg & Up
- Adjustable nylon collar strap
- Rechargeable Lithium battery
- Water resistant/weatherproof
- Low battery indicator
- Low spray indicator
- Collar On/Off indicator
- Approximately 30-40 sprays per refill
- Built in bark/spray counter

Spray Nozzle: From where the spray is ejected when your dog's bark is detected


Microphone Bark Sensor: Detects dog's barking

Refill Port: Spray refill port

Two Colour LED: Green means battery is good. Red means collar needs to be charged.

On/Off Button: Turns the collar on and off, and resets the spray counter/bark counter

USB Charging Port: Recharge the collar with USB cable

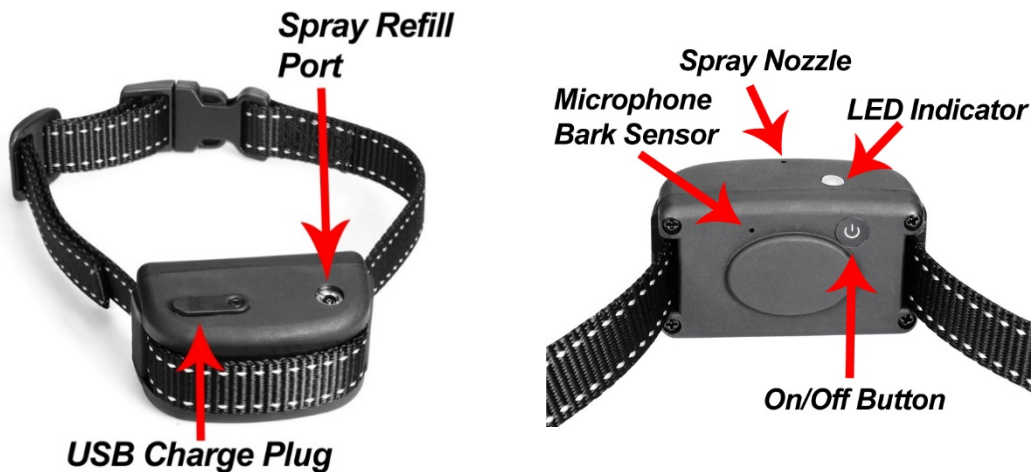

Turning the collar on/off

To turn the collar on: press and hold the On/Off button for 2 seconds, the collar should beep twice (short beep) and flash Green. Collar will flash Green continuously every few seconds to indicate the collar is on and battery is good. If the LED flashes red it means it needs to be charged.

To turn the collar off: when turning the collar off, press and hold the on/off button again for 2 seconds. The collar should have a longer beep and LED indicator light will flash a few times (indicating how many times the dog barks/collar has been activated).

Fitting the Barkmate Spray bark collar

Important: It is important to fit the Barkmate Spray bark collar on the dog properly to make it work.

To assure a proper fit, please follow the steps:

1. Make sure that the collar is turned off. Avoid turning the collar on/off while it is on your dog.
2. Start with the dog standing not sitting.
3. Place the Barkmate Spray bark collar high on your dog's neck close to the ears.
4. Position the unit underneath your dog's neck with the spray nozzle facing upward.
5. It is recommended to trim the fur a little bit for long a hair dog so it won't block the bark sensor.
6. Fit the collar snugly as a loose fit may cause false activation
7. Check for a firm fit of the Bark Control Collar by inserting one or two fingers between the collar and the back of the dog's neck. The fit should be snug but not constricting.
8. Allow your dog to wear the collar for a few minutes, then check the fit again.

Refill the Barkmate Spray Collar

1. Remove the collar from your dog.
2. Turn the unit off.
3. Hold the Barkmate Spray Canister upright and firmly press the nozzle down into the Refill Port. Hold for 15 seconds and remove.

Note: If spray leaks out, you may need to press harder to complete the seal.

4. Turn on the Barkmate spray collar.

Recharging the Barkmate Spray Collar

The LED light will flash red every second when the battery is low. Use the supplied USB cable to charge the Barkmate Spray Collar. It can be charged via USB port of a computer or any USB AC charger. It normally takes around 2 to 3 hours to charge the collar and the LED will turn Green when it is fully charged.

Trouble Shooting Guide

The Spray Collar Sprays but the dog is still barking

Check to make sure the Spray Nozzle points towards the dog's snout. Also make sure the dog's fur does not block the spray.

The Battery ran out of charge very quickly

You may find the first few uses the battery runs down a little more rapidly because the dog is still learning the bark triggers the spray. ***Be sure the collar is turned off when not in use.***

Spray leaks out when refilling

The Spray canister has to be held vertically straight when filling. The best way to do this is by putting the collar on a flat table when refilling the collar.

Check to see if there is any spray residue built up in the spray nozzle & clear if necessary, with a fine tip bush.