



# Advance Bark Control Deluxe



## DMT Advance Bark Control Collar Deluxe

# Manual

### **Australia:**

Address: Unit2/6 Nuban Street, Currumbin Waters, QLD 4223

Phone: 07 5559 9100 / Web: [www.dogmaster.com.au](http://www.dogmaster.com.au)

### **New Zealand:**

Address: P.O. Box 12741, Chartwell, Hamilton 3210


Phone: (07) 855 4799 / Web: [www.dogmaster.co.nz](http://www.dogmaster.co.nz)



**Z1076  
N13047**

## Main Features:

- Vibration only stimulation
- 6 levels of static correction with vibration warning
- 6 sensitivity settings for different dog's temperament
- Easy "T" testing mode to check the collar
- Waterproof and rechargeable collar with quick charge
- LED indicator for battery and operation

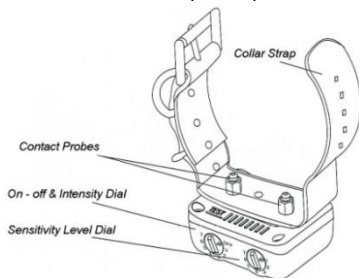

### ON-OFF & Intensity Dial

The ON-OFF & Intensity Dial on the collar is used to turn the DMT Advance Bark Collar Deluxe on and off as well as to select the level.

"OFF" position to turn off the Collar.

"V" is the vibration only stimulation.



The Level 2 is lowest static correction and Level 7 is the highest output. There is a vibration warning before the static correction.

### Sensitivity Dial

The sensitivity dial is used to adjust the sensitivity level of the bark sensor. It would adjust how easy the collar activated. However It **would not** affect the output of the collar.




Level 1 is the lowest. “T” is the highest and normally used for testing the collar.

### Charging the collar


The LED indicator will flash Green every 2 seconds when the collar is on. If the collar is not activated within 10 seconds, it will turn into sleep mode and the LED will be off.

The DMT Advance bark collar has a built in safety feature which will automatically shut off for 1 minute if it is activated 5 times or more. The LED light will flash Red and Green during this period of time. Then the light will be off to indicate it is back to sleep mode.

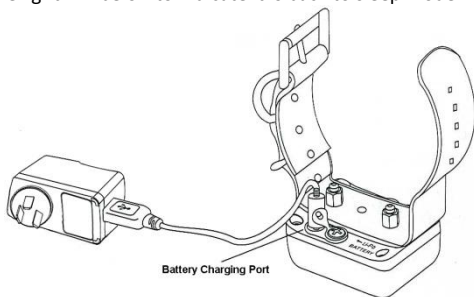

### Testing

1. Turn the “Intensity” level to 1 and the “Sensitivity Dial” to level 5
2. Test by scratching the rough surface of the test tool on the collar (as shown in the diagram) using a coin or a pen. The LED light should flash Green to indicate the collar is working.

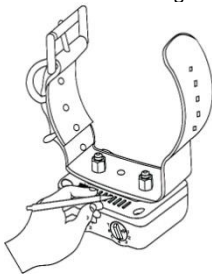

## **Fitting the Collar**

The collar strap should be adjusted so that the contact points are held firmly against the dog's skin. Fasten the collar enough to allow one or two fingers to fit between the collar strap and your dog's neck.

If the collar is too loose, it will be ineffective because there is no contact between the dogs' skin and the contact points.

Collar should not be used for more than 10 hours per day. If a rash develops, discontinue use.

## **Regular Maintenance**

- Check Contact Points for tightness weekly, do not over tighten.
- Clean Contact Points with alcohol/metho weekly
- Fully discharge and recharge the battery every 3 months  
*(Note: make sure the collar is turned off for checking and cleaning.)*
- Check your dog's neck for irritation and wash neck weekly.

## **12 Months Warranty:**

All of our products are covered by warranty. Our warranty offers free repair for manufacturing faults. It does not cover damage as a result of inappropriate use of the product, wear and tear, damage from impact, dog chews, over-use or abuse or the depletion of consumables, such as batteries or citronella spray etc. The warranty is also not applicable if the product is used in ways that are outside the products intended use.

## **Australia Only:**

"Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure."